




Shanghai Pvsys New Energy Co.,Ltd  
Email: sales@pv-system.net  
www.pv-system.net

## HJT MONOCRYSTALLINE SOLAR PANEL

### PVS-720W/730W-M12HDT

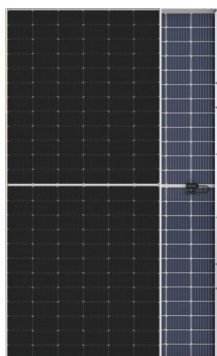

#### Introduction:

Redefined the high-efficiency module series by integrating 210mm silicon wafers with HJT cell technologies. Our panel combined creative technology effectively and extremely improved the module efficiency and power output.


#### Key Features:

- Less mismatch to get more power
  - Less power loss by minimizing the shading impact
  - Competitive low light performance
  - 3 times EL test to ensure best quality
  - Anti-PID
- Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
  - Outstanding reliability proven by PVEL for stringent Environment condition: Sand, acid, salt and hail stones, 2400Pa wind load and 5400Pa snow load

**Electrical Characteristics:** STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25 C AM=1.5


Module Type	PVS-720W-M12HDT	PVS-730W-M12HDT
Maximum Power (Pmp)	720W	730W
Open Circuit Voltage (Voc)	50.95V	51.01V
Short Circuit Current (Isc)	17.66A	17.78A
Maximum Power Voltage (Vmp)	42.70V	43.00V
Maximum Power Current (Imp)	16.86A	16.98A
Module Efficiency at STC(%)	23.17%	23.49%
Maximum System Voltage	1500VDC	
Maximum Series Fuse Rating	35A	
Power Tolerance	0~+3%	

#### Current-Voltage Characteristic (I-V Curve)

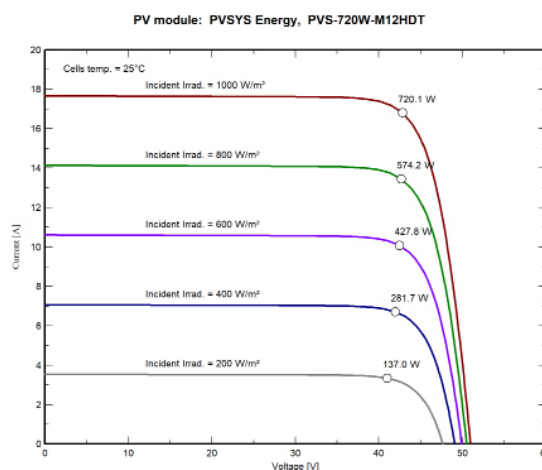

#### Mechanical Specifications:

External Dimensions	2385x1303x33 mm
Solar Cells	Mono 132cells
Front Glass	3.2mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm <sup>2</sup>
Weight	38.7kg
Mechanical Load	Front side 5400Pa Rear side 2400Pa
Packing	33pcs/pallet, 594pcs/40HQ

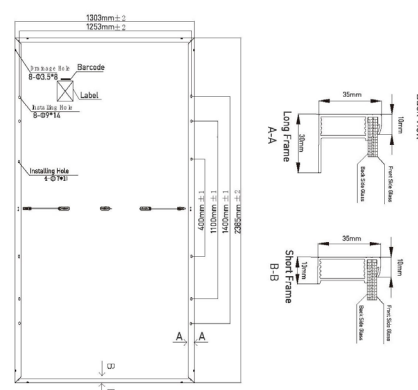

#### Temperature ratings (STC):

Temperature Coefficient of Isc	+0.040%/°C
Temperature Coefficient of Voc	-0.240%/°C
Temperature Coefficient of Pmax	-0.260%/°C

#### Product warranty:

15 years guarantee on product material and workmanship  
30 years guarantee on Liner power output

**Quality Standard:** IEC61215-1-1:2021, IEC61730-1 :2018, IEC61730-2:2018, Fire safety Class C