



# PCB Magazine type Buffer



# PCB Magazine type Buffer

## FEATURE


- User friendly ' soft touch ' LED HMI control panel easier operation
- Top & bottom pneumatic clamps to secure magazine rack
- No PCB breakage guaranty because of special design
- Store NG/OK PCBs automatically according to the signal of previous equipment
- Six operation modes: FIFO(First in first out).LIFO(last in first out) and pass through function
- Fast, smooth and accurate retrieval positions
- Build in recall function for control the order of PCB pass in and out
- 50 PCBs storing capability
- SMEMA compatible



# PCB Magazine type Buffer


## TECHNICAL PARAMETERS

- Description: This device used for receiving NG board or memory board
- No.of Magazine: Upper conveyor: 1 magazine; lower conveyor: 2 magazine
- Indexing pitch: 10.20.30.40mm or specify
- Power Source: AC 110 volts or 220 volts; single phase
- Power consumption: Max 250VA
- Air pressure & air consumption: 4-6bar, 15ltr/min
- Transport height: 900±20MM
- Transport direction: From left to right or right to left

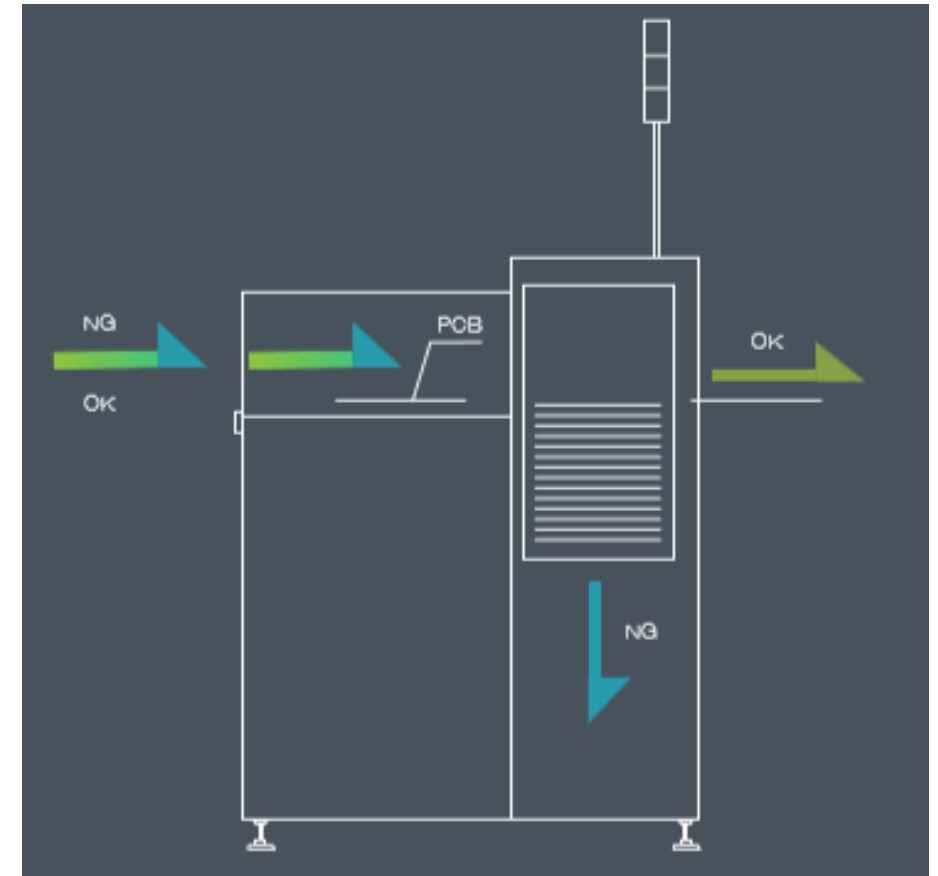



# PCB Magazine type Buffer

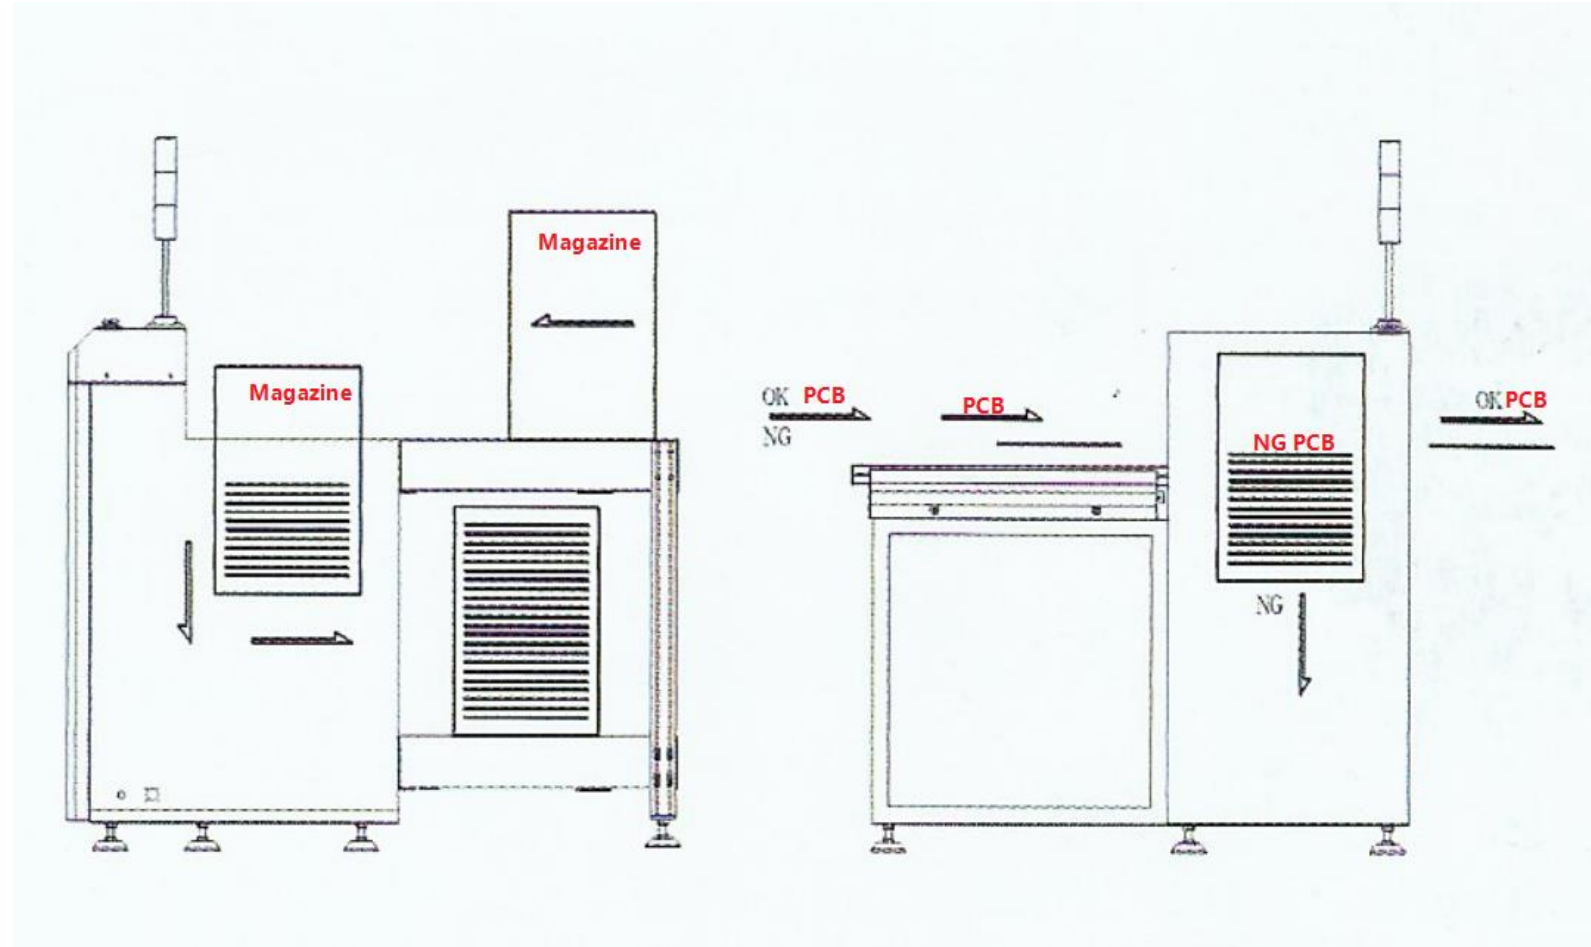


# PCB Magazine type Buffer working video

Model	Dimnsion (LWH mm)	PCB Size (mm)	Magazine Size	Weight(Kg)	Price(USD)
SBM250	1150x1150x1205	50x50-330x250	355x320x563	160	
SBM330	1350x1350x1205	50x50-445x330	460x400x563	220	
SBM390	1550x1550x1205	50x50-530x390	535x460x563	280	
SBM460	1750x1750x1205	50x50-530x460	535x530x563	340	



# PCB Drop Door Conveyor

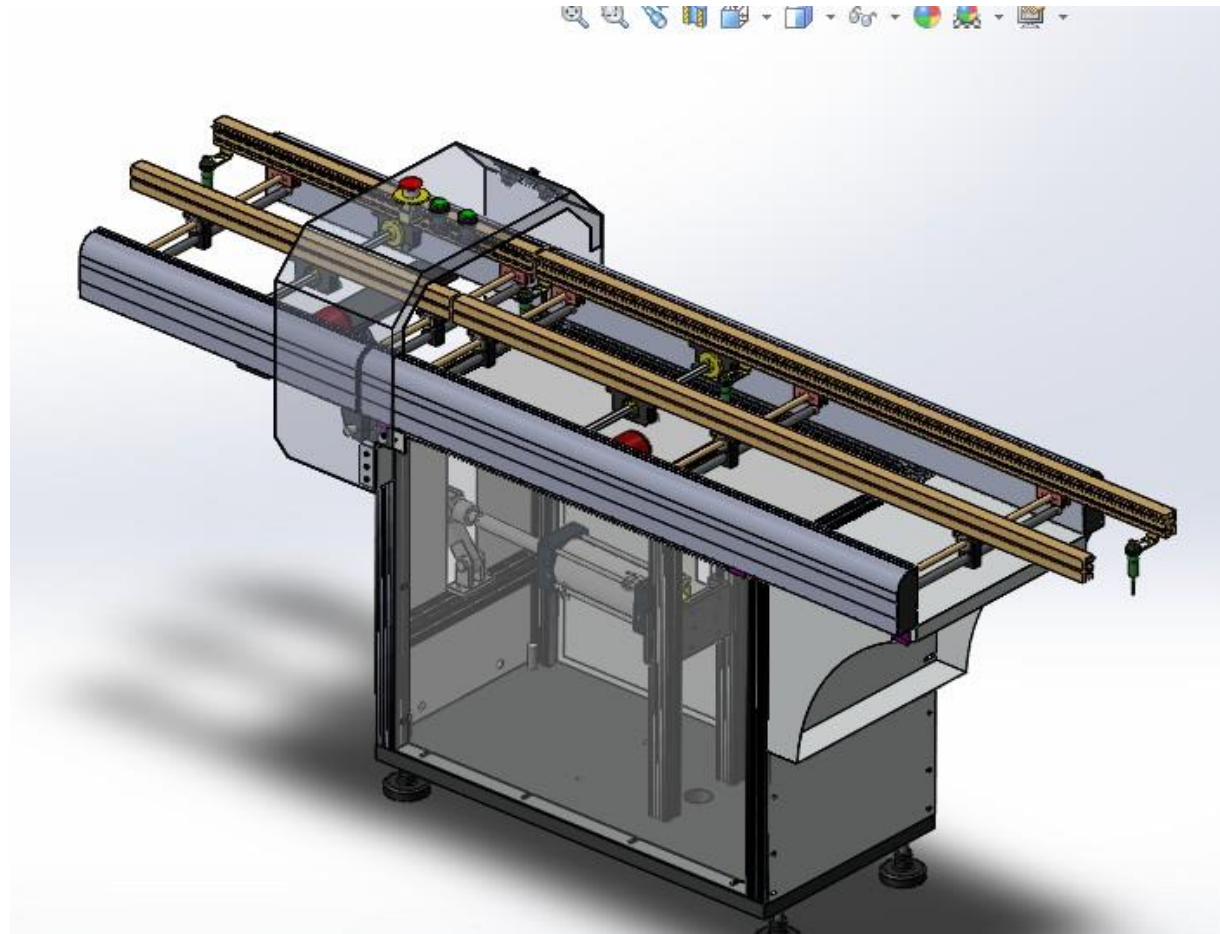

# PCB Drop Door Conveyor

This equipment is used for intermediate aisle connection when the SMT production line is very long

## FEATURE


- Lowering and lifting of gate conveyor (push buttons control)
- 650 mm passage way or specify
- Parallel and smooth width adjustment (leadscrew)
- Safety sensor installed to enhance safety
- SMEMA compatible



# PCB Drop Door Conveyor

## TECHNICAL PARAMETERS

- Description: used for intermediate aisle connection when the SMT production line is very long
- Belt type: Round belt or oblate belt
- Conveyor Speed: 0.5-20M/min or specify
- Power supply: AC110 volts or 220 volts; single phase
- Power: Max 100VA
- Air pressure & consumption: 4-6bar, 48ltr/min max
- Transport height: 900±20MM (or customer specified)
- Transport direction: From left to right (or right to left)

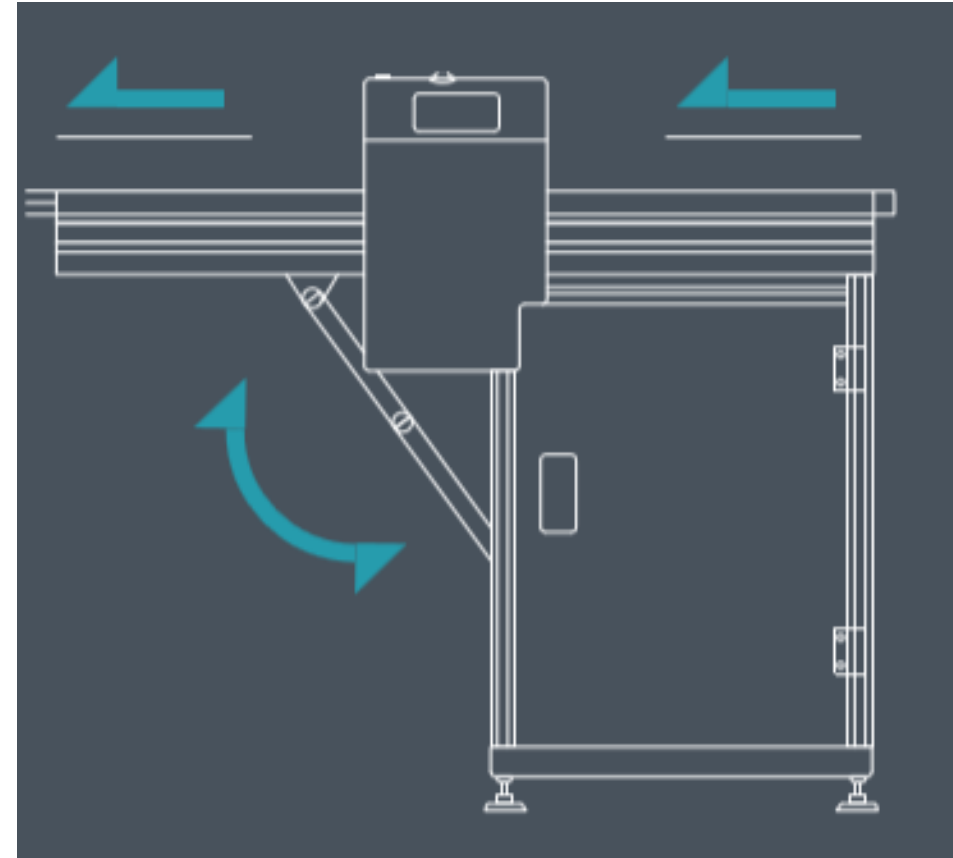



# PCB Drop Door Conveyor



# PCB Drop Door Conveyor

Model	Dimnsion (LWH mm)	PCB Size (mm)	Weight(Kg)	Price(USD)
SLC460W-N	1300x570x1050	50x50-530x460	180	

# Welcome inquiry

- 1, Please visit : [www.smthelp.com](http://www.smthelp.com)
- 2, Find us more: <https://www.facebook.com/autoinsertion>
- 3, Know more our team: <https://cn.linkedin.com/in/smtsupplier>
- 4, Welcome to our factory in Shenzhen China
- 5, See more machine working video, please Youtube: Auto Insertion
- 6, Google: Auto+insertion, to get more informations
- 7, Looking forward to your email: [info@smthelp.com](mailto:info@smthelp.com)



