

Application

- SJL80A Repack Tray, Tubes, Bulks etc To Tape & Reel, For your Pick & Place Machine




- SJL80A Allow for radial parts, semiconductors, passives and even mechanical parts to be placed into embossed carrier tape so that they can be sealed with either heat seal or pressure seal cover tape.
- Simple to use machines with advanced features such as EPD (Empty Pocket Detector), Low Cover Tape Sensor, footswitch control and much more.




use wrench to adjust nuts of four support feet, keep platform surface to horizontality, as the first condition of calibration.


See picture below

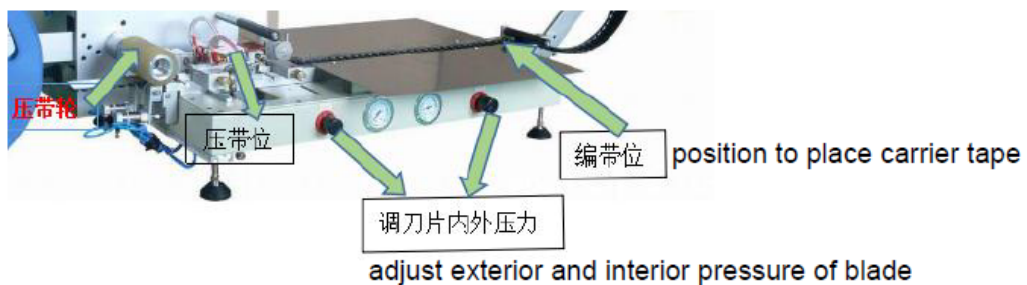

Feeding: put on empty carrier tape, which to be used to pack components

as show below

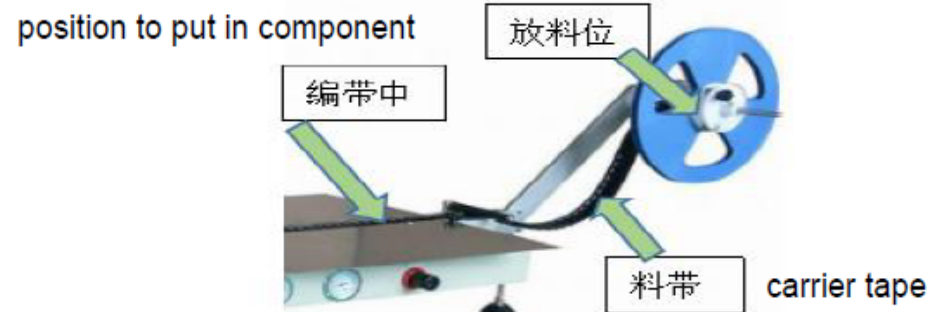

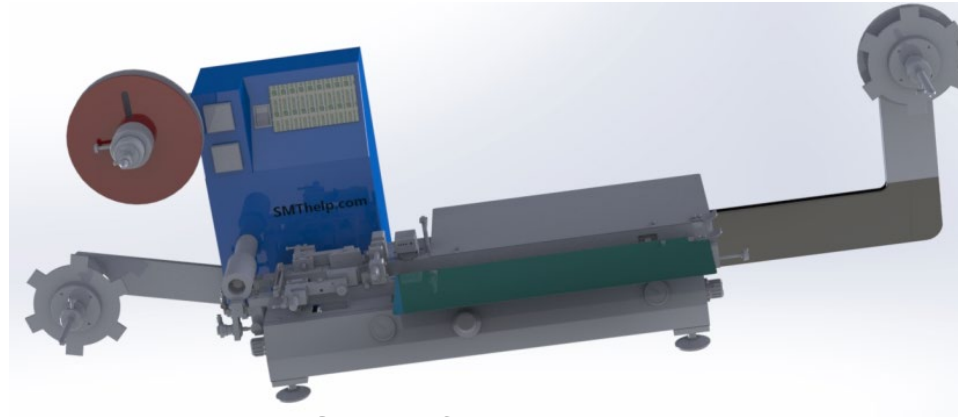


Specification

Packing mode	Automatic sealing, furling and manual empty
Operating mode	Touch screen
Packing speed	Adjustable, as high as 400 meters per hour
Applicable scope	8 to 72 mm and 8 to 200mm carrier tapes
Function	Starving detection and alarm
Power supply	AC220V
Power consumption	400W
Pressure	0.4 to 06 MPa
Temperature range	Room temperature to 300 centigrade degree
Volume	L170 x W60 x H60 cm
Weight	35kg

Features

- Adjustable track assembly for tape widths up to 72 mm
- Independently controlled seal temperature for each side of the cover tape.
- Dual stage fully adjustable Heat and PSA sealer assembly
- User friendly software assures ease of setup and operation
- Optional software allows features

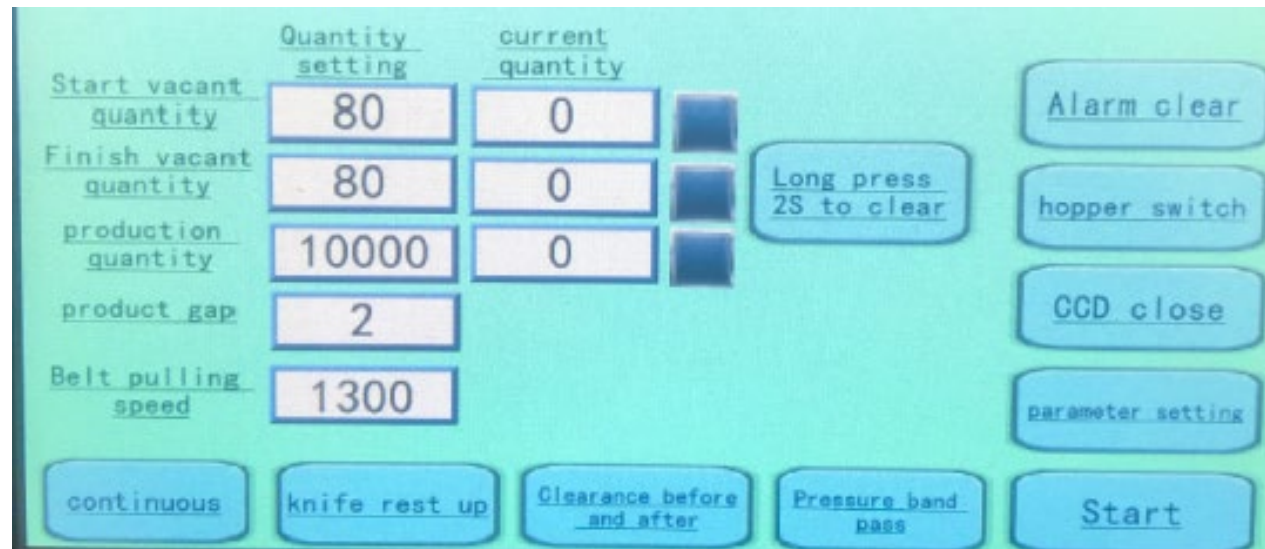




Advantages:

- User friendly 'soft-touch' LED control membrane control panel
- Full closed design ensures operational security levels
- Top cover can be opened for easy access to hardware during maintenance
- Parallel and smooth width adjustment (screw)
- Steady and precise scaling (retractable motor)
- Minimize transmission clearance between conveyor
- Different lengths available upon request
- Compatible SMEMA interface

SJL80A Major Consumables List



SJL80A Plastic Spool for SMD

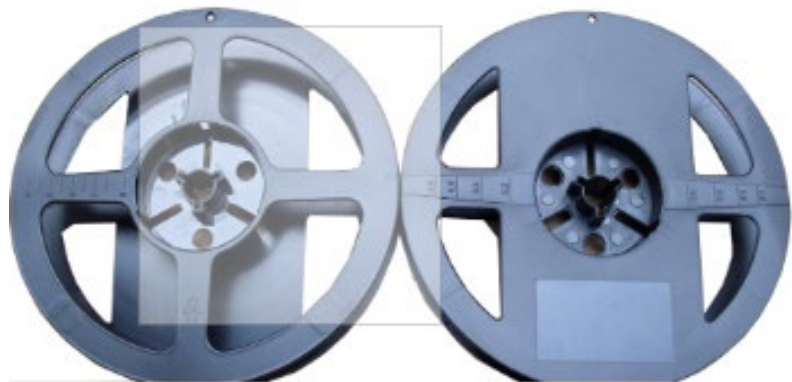

Product Description

Width W=8mm,

Diameter Φ =23.33mm (7 inches)

Diameter Φ =33mm (13 inches)

Diameter Φ =38mm (15 inches)

Material: PS/PP

Appearance: black / I blue / white can be customized color

Product surface resistance: 10¹⁰-11 Ω / \square or above.

Suitable for STI tape winding packaging with 8/12/16/24/32/44/56/72mm bandwidth.


Product Name	Plastic Spool for smd
Material	PP/PS
Color	black / I blue / white can be customized color
Standard	Anti-static, environmental protection, drop resistance, aging resistance
Feature	ROHS compliant, recyclable
Delivery time:	2-5Days

SJL80A Carrier Tape



Products Information	
Name	Carrier tape
Carrier Width	8mm, 12mm, 16mm, 24mm, 32mm, 44m, 56mm, or customized
material	Plastic(PS/PC/PS) and Paper
Color	Black, or customized
Type	punched carrier tape
Length	1000M/R
Application	SMD SMT encapsulation
Remarks	Size can be customized

Main application areas

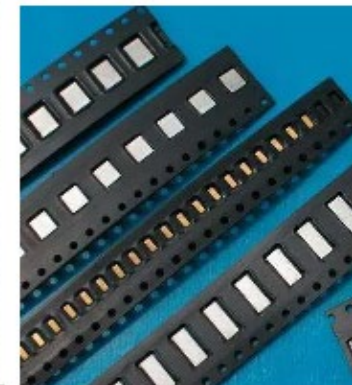


SJL80A Cover Tape



Products Information


Name	Cover tape
Carrier Width	5.3mm-81.5mm
material	Plastic(PET/PE/EVA)
Color	Transparent
Thickness	0.06mm
Length	300M/480M/500M/2500M/5000M
Application	SMD SMT encapsulation
Remarks	Size can be customized

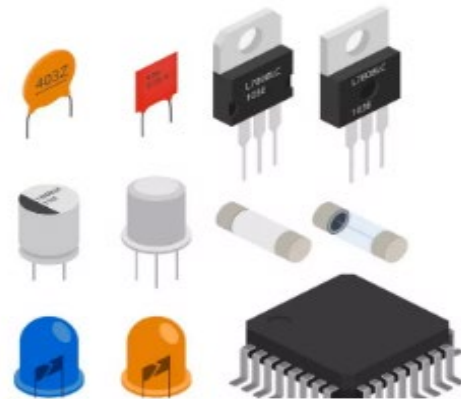

Capacitors, resistors, connectors, micro-transformers, inductors, electronic switches...



Widely used in the packaging of surface mount components such as ICs, diodes, triodes, and crystals...

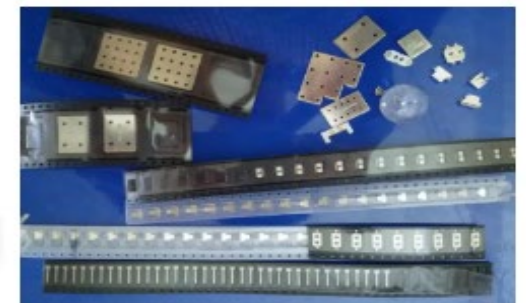

Various hardware (metal) small devices and so on...

Best After-sales service

- **Worldwide Support**
- **Free Installation/ Training**
- **1 day lead-time (spare parts)**
- **1 Month customize solution**



WELCOME INQUIRY

Please visit

www.smthelp.com

Find us more

<https://www.facebook.com/autoinsertion>

Know more our team

<https://cn.linkedin.com/in/smtsupplier>

Welcome to our factory in Shenzhen China

See more machine working video, please Youtube

Auto Insertion

Google

Auto+insertion, to get more information

Looking forward to your email

info@smthelp.com