

# SHANGHAI PVSYS NEW ENERGY CO.,LTD

Shanghai Pvsys New Energy Co.,Ltd is the professional manufacturer of solar products in the market for more than 11 years.

Our solar products include solar panel, solar hybrid inverter, controller, pump inverter, battery and other accessories.

We are not only offer these solar products, but also offer the whole complete solar system to our customers. With our professional solution and best offer, customers can save their total cost of the whole solar system.

Our solar system includes: solar on grid system, solar off grid system, DC&AC solar water pump system, solar air conditioner system, solar street light system, solar camera system and solar water treatment system.

We made our system in modularity, it is easy for our customers to maintain the system and it is easy for us to offer the best after sales service.

We hope to have the opportunity to introduce our solar products and solar system to our customers in the world, let's protect our earth together and keep it green.




# SHANGHAI PVSYS NEW ENERGY CO.,LTD



# SHANGHAI PVSYS NEW ENERGY CO.,LTD




# SHANGHAI PVSYS NEW ENERGY CO.,LTD

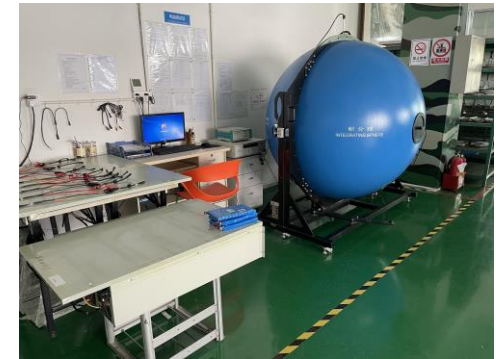

# PVS-550W/560W-96M

## HJT Monocrystalline solar panel PVS-550W/560W-96M

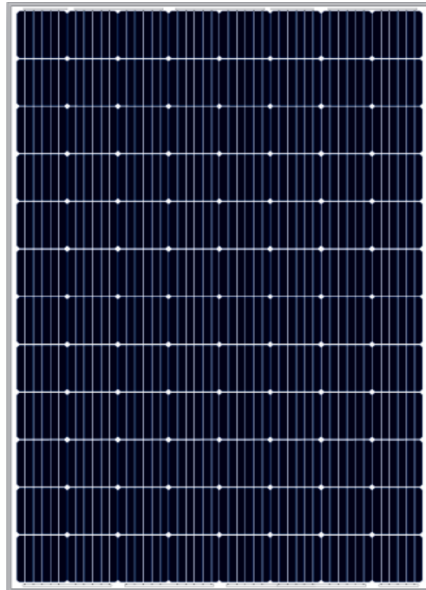

Certification:

CE

IEC61215-1-1:2021

IEC61730-1:2018

IEC61730-2:2018

Fire safety Class C

Redefined the high-efficiency module series by integrating 157mm silicon wafers with HJT multi-busbar high efficiency cells.


Our panel combined creative technology effectively and extremely improved the module efficiency and power output.

### KEY FEATURES:

- Less mismatch to get more power
- Less power loss by minimizing the shading impact
- Competitive low light performance
- 3 times EL test to ensure best quality
- Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
- Outstanding reliability proven by PVEL for stringent Environment condition:  
Sand , acid, salt and hail stones  
2400Pa wind load and 5400Pa snow load  
Anti-PID

### WARRANTY:

#### Additional value from linear warranty

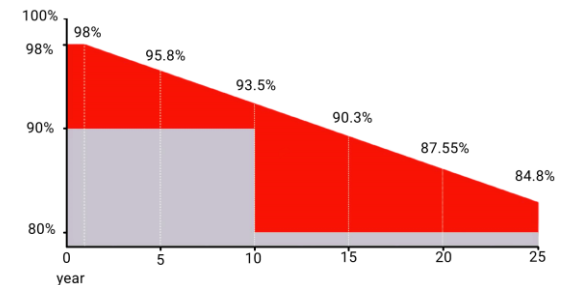

Guarantee on product material and workmanship



Linear power output warranty

# PVS-550W/560W-96M

## HJT Monocrystalline solar panel PVS-550W/560W-96M

Electrical Characteristics:



Module Type	PVS-550W-96M	PVS-560W-96M
Maximum Power (Pmp)	550W	560W
Open Circuit Voltage (Voc)	59.62V	59.70V
Short Circuit Current (Isc)	11.68A	11.87A
Maximum Power Voltage (Vmp)	49.05V	49.15V
Maximum Power Current (Imp)	11.21A	11.40A
Module Efficiency at STC( $\eta_m$ )	21.46%	21.85%
Power Tolerance	(0,+3%)	
Maximum System Voltage	1500VDC	
Maximum Series Fuse Rating	30A	
STC: Irradiance 1000 W/m <sup>2</sup> module temperature 25° C AM=1.5 Power measurement tolerance: +/-3%		

# PVS-550W/560W-96M

## HJT Monocrystalline solar panel PVS-550W/560W-96M

### Mechanical Specifications:

External Dimensions	1956x1310x40 mm
Weight	28 kg
Solar Cells	HJT Mono (96pcs)
Front Glass	3.2mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm <sup>2</sup>
Mechanical Load	Front side 5400Pa Rear side 2400Pa

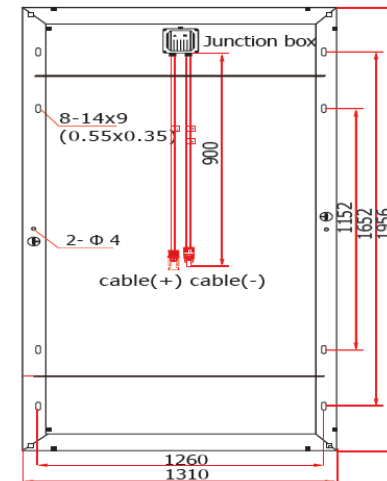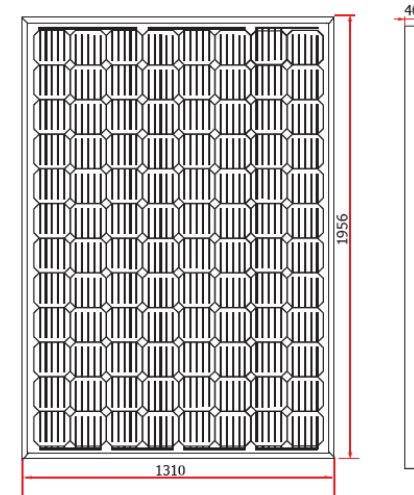

# PVS-550W/560W-96M

## HJT Monocrystalline solar panel PVS-550W/560W-96M

### Temperature Characteristics:

Pmax Temperature Coefficient	-0.26 %/° C
Voc Temperature Coefficient	-0.24 %/° C
Isc Temperature Coefficient	+0.04 %/° C
Operating Temperature	-40~+85 ° C
NOCT	45±2 ° C

### Packing Configuration:

Container	40'HQ
Pieces per carton box	2
Pieces per Container	580

### I-V Curve

