

SHANGHAI PVSYS NEW ENERGY CO.,LTD

Shanghai Pvsys New Energy Co.,Ltd is the professional manufacturer of solar products in the market for more than 11 years.


Our solar products include solar panel, solar hybrid inverter, controller, pump inverter, battery and other accessories.

We are not only offer these solar products, but also offer the whole complete solar system to our customers. With our professional solution and best offer, customers can save their total cost of the whole solar system.

Our solar system includes: solar on grid system, solar off grid system, DC&AC solar water pump system, solar air conditioner system, solar street light system, solar camera system and solar water treatment system.

We made our system in modularity, it is easy for our customers to maintain the system and it is easy for us to offer the best after sales service.

We hope to have the opportunity to introduce our solar products and solar system to our customers in the world, let's protect our earth together and keep it green.

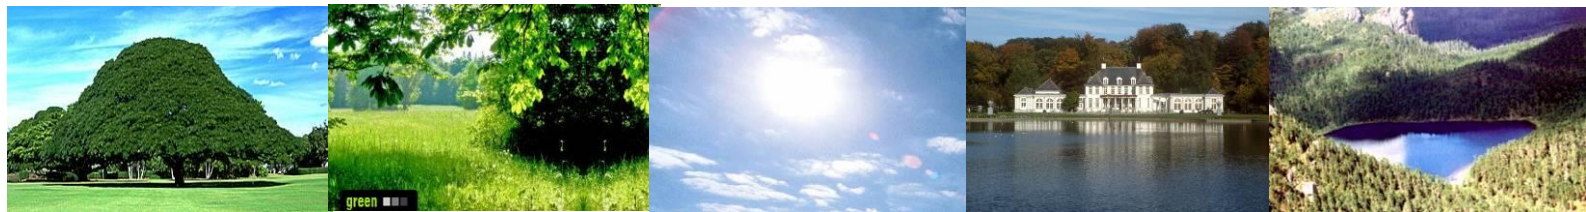


SHANGHAI PVSYS NEW ENERGY CO.,LTD



SHANGHAI PVSYS NEW ENERGY CO.,LTD



SHANGHAI PVSYS NEW ENERGY CO.,LTD

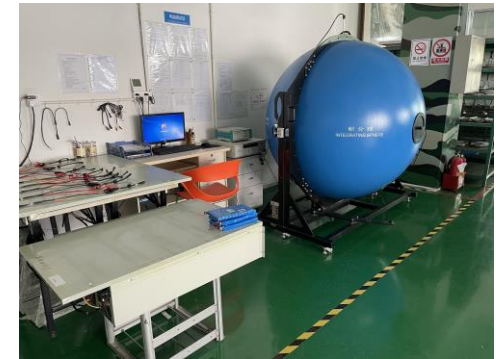

PVS-395W/400W-72M

Monocrystalline solar panel PVS-395W/400W-72M



Certification:

CE

IEC61215-1-1:2021







IEC61730-1:2018

IEC61730-2:2018

Fire safety Class C


Redefined the high-efficiency module series by integrating 156.75mm silicon wafers with multi-busbar technologies. Our panel combined creative technology effectively and extremely improved the module efficiency and power output.

KEY FEATURES:

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent Environment condition:
Sand , acid, salt and hail stones
2400Pa wind load and 5400Pa snow load
Anti-PID

WARRANTY:

Additional value from linear warranty

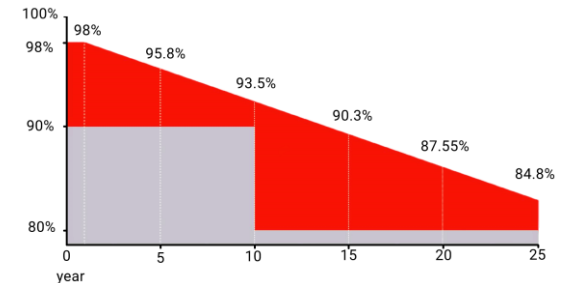

Guarantee on product material and workmanship



Linear power output warranty

PVS-395W/400W-72M

Monocrystalline solar panel PVS-395W/400W-72M

Electrical Characteristics:

Module Type	PVS-395W-72M	PVS-400W-72M
Maximum Power (Pmp)	395W	400W
Open Circuit Voltage (Voc)	47.89V	49.70V
Short Circuit Current (Isc)	10.31A	10.35A
Maximum Power Voltage (Vmp)	40.11V	40.22V
Maximum Power Current (Imp)	9.85A	9.95A
Module Efficiency at STC(η_m)	20.35%	20.17%
Power Tolerance	(0,+3%)	
Maximum System Voltage	1500VDC	
Maximum Series Fuse Rating	20A	
STC: Irradiance 1000 W/m ² module temperature 25° C AM=1.5 Power measurement tolerance: +/-3%		

PVS-395W/400W-72M

Monocrystalline solar panel PVS-395W/400W-72M

Temperature Characteristics:

Pmax Temperature Coefficient	-0.35 %/° C
Voc Temperature Coefficient	-0.27 %/° C
Isc Temperature Coefficient	+0.05 %/° C
Operating Temperature	-40~+85 ° C
NOCT	45±2 ° C

Packing Configuration:

Container	20'GP	40'HQ
Pieces per Container	310	818

I-V Curve

