


PVS-695W/700W-M12H

HJT Monocrystalline solar panel PVS-695W/700W-M12H

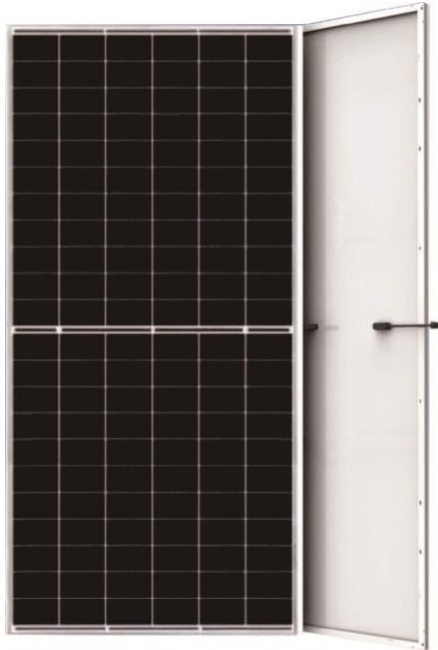

Certification:
CE
IEC61215-1-1:2021
IEC61730-1:2018
IEC61730-2:2018
Fire safety Class C

Redefined the high-efficiency module series by integrating 210mm silicon wafers with HJT multi-busbar high efficiency half cut cells.

Our panel combined creative technology effectively and extremely improved the module efficiency and power output.


KEY FEATURES:

- Less mismatch to get more power
- Less power loss by minimizing the shading impact
- Competitive low light performance
- 3 times EL test to ensure best quality
- Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI

- Outstanding reliability proven by PVEL for stringent Environment condition:
Sand , acid, salt and hail stones
2400Pa wind load and 5400Pa snow load
Anti-PID

WARRANTY:

Additional value from linear warranty

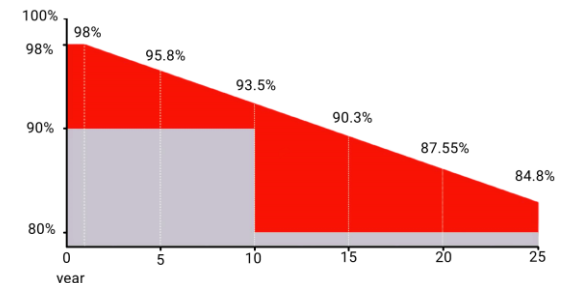

Guarantee on product material and workmanship



Liner power output warranty

PVS-695W/700W-M12H

HJT Monocrystalline solar panel PVS-695W/700W-M12H

Electrical Characteristics:


Module Type	PVS-695W-M12H	PVS-700W-M12H
Maximum Power (Pmp)	695W	700W
Open Circuit Voltage (Voc)	49.98V	50.13V
Short Circuit Current (Isc)	17.37A	17.43A
Maximum Power Voltage (Vmp)	41.95V	42.10V
Maximum Power Current (Imp)	16.57A	16.63A
Module Efficiency at STC(η_m)	22.37%	22.53%
Power Tolerance	(0,+3%)	
Maximum System Voltage	1500VDC	
Maximum Series Fuse Rating	30A	
STC: Irradiance 1000 W/m ² module temperature 25° C AM=1.5 Power measurement tolerance: +/-3%		

PVS-695W/700W-M12H

HJT Monocrystalline solar panel PVS-695W/700W-M12H

Mechanical Specifications:

External Dimensions	2385x1303x35 mm
Weight	35.7 kg
Solar Cells	HJT Mono (132pcs)
Front Glass	3.2mm tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm ²
Mechanical Load	Front side 5400Pa Rear side 2400Pa

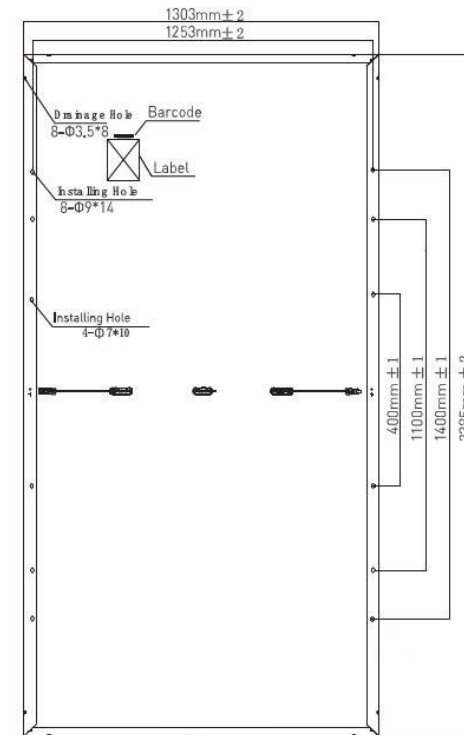

PVS-695W/700W-M12H

HJT Monocrystalline solar panel PVS-695W/700W-M12H

Temperature Characteristics:

Pmax Temperature Coefficient	-0.26 %/° C
Voc Temperature Coefficient	-0.24 %/° C
Isc Temperature Coefficient	+0.04 %/° C
Operating Temperature	-40~+85 ° C
NOCT	45±2 ° C

Packing Configuration:

Container	40'HQ
Pieces per Pallet	31
Pallets per Container	18
Pieces per Container	558

I-V Curve

